
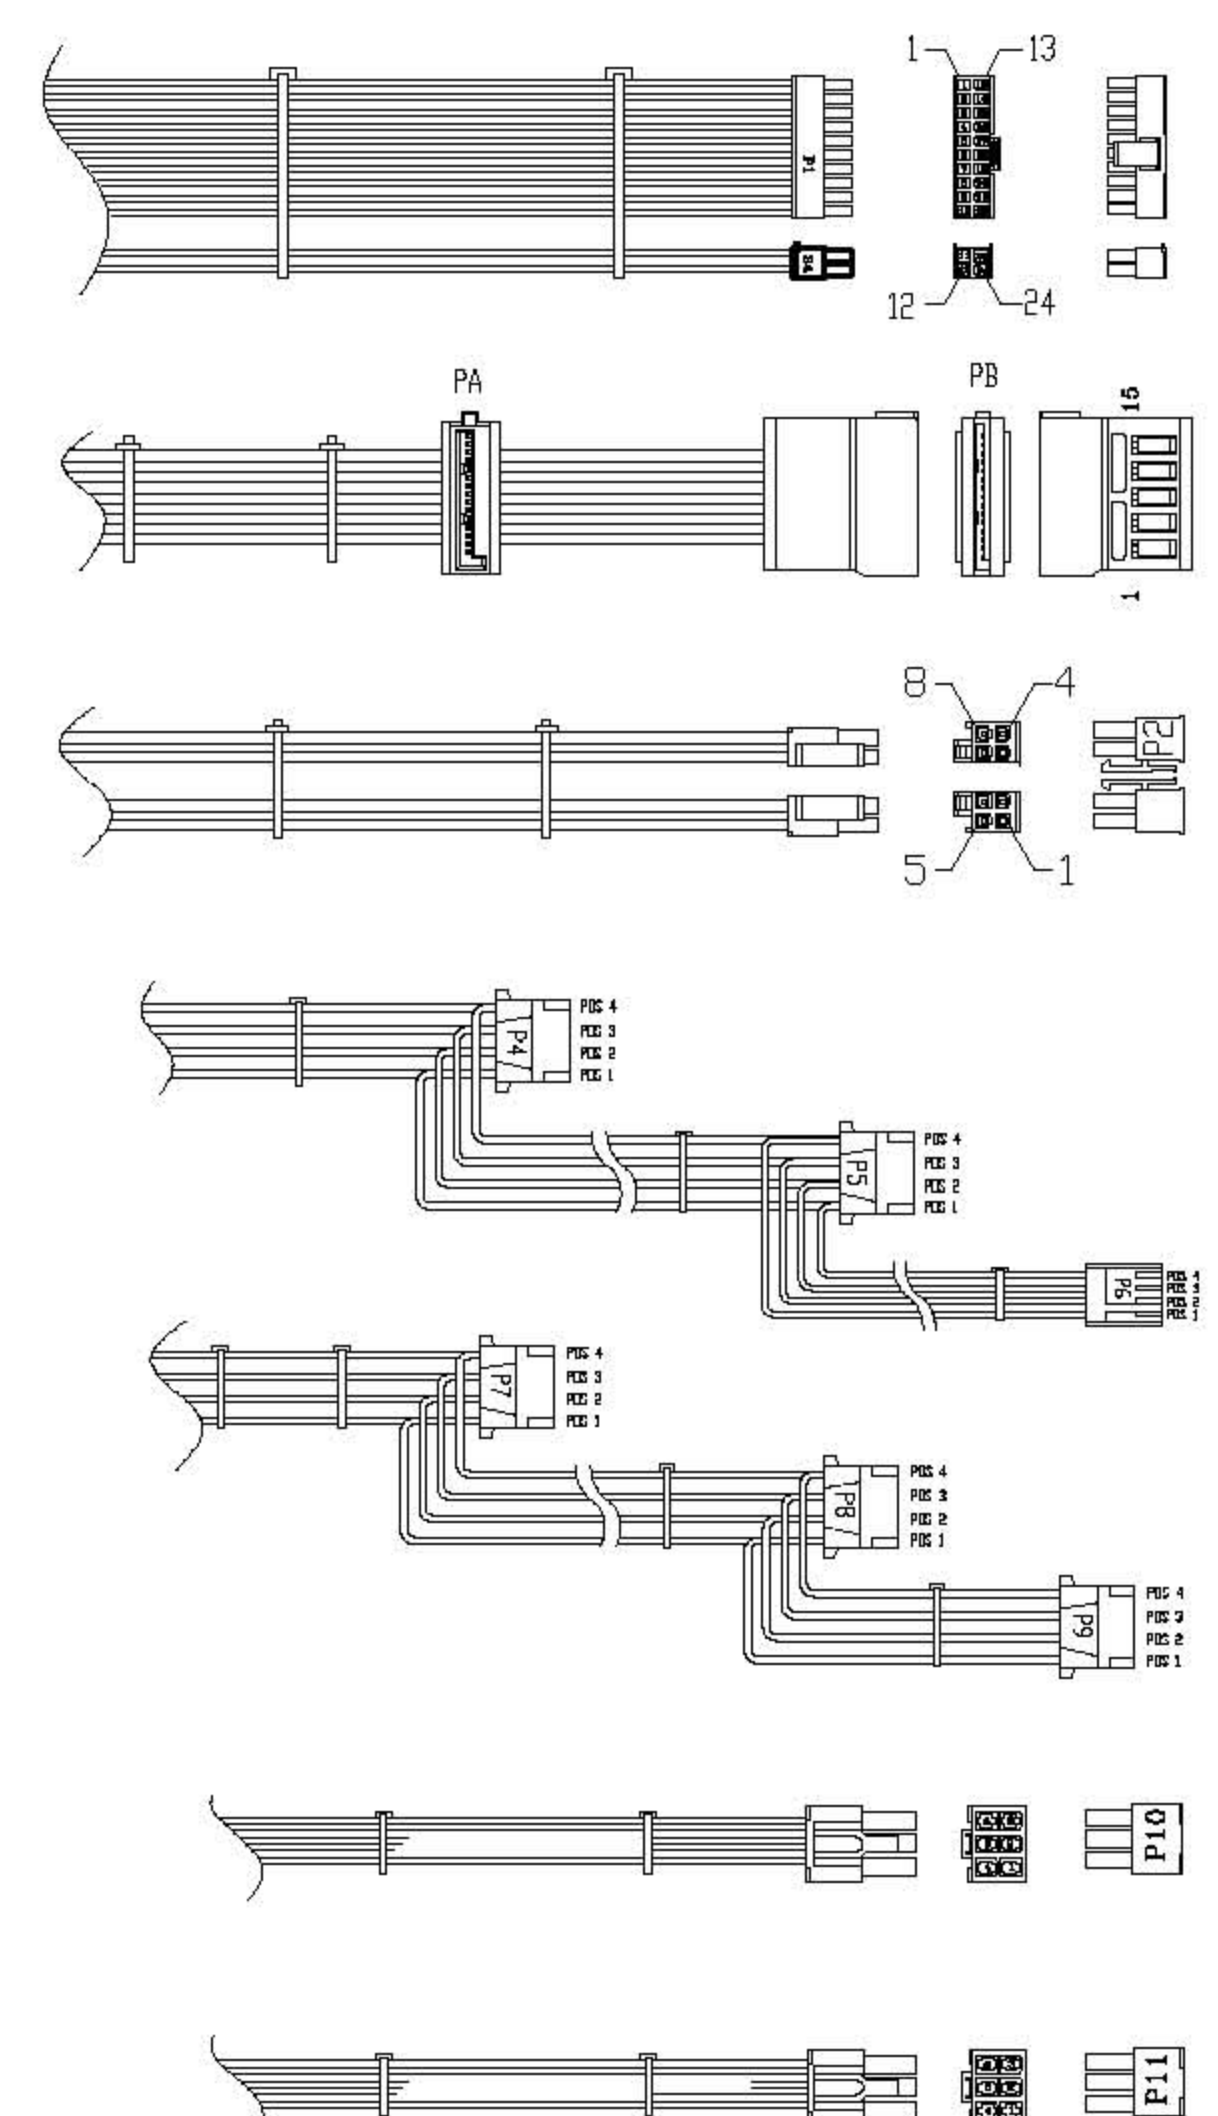


| REF. ID. | PIN NO. | SIGNAL | WIRE COLOR | GAUGE | CONNECTOR TYPE | CABLE LENGTH | | |
|----------------|---------|------------|------------|-------|---|--------------------------------------|--|--|
| P1 | 1 | +3.3VDC | ORANGE | 18 | JWT C4202H02-AMP+, C4202H02-ARUP+ or EQUIV. | 500 ⁺³⁰ ₋₁₀ mm | | |
| | 2 | +3.3VDC | ORANGE | 18 | | | | |
| | 3 | COM | BLACK | 18 | | | | |
| | 4 | +5VDC | RED | 18 | | | | |
| | 5 | COM | BLACK | 18 | | | | |
| | 6 | +5VDC | RED | 18 | | | | |
| | 7 | COM | BLACK | 18 | | | | |
| | 8 | PW-OK | GRAY | 24 | | | | |
| | 9 | +5Vsb | PURPLE | 20 | | | | |
| | 10 | +12V3 | YELLOW | 18 | | | | |
| | 11 | +12V3 | YELLOW | 18 | | | | |
| | 12 | +3.3VDC | ORANGE | 18 | | | | |
| | 13 | +3.3VDC | ORANGE | 18 | | | | |
| | 13 | +3.3Vsense | BROWN | 24 | | | | |
| | 14 | -12VDC | BLUE | 24 | | | | |
| | 15 | COM | BLACK | 18 | | | | |
| | 16 | PS-ON | GREEN | 24 | | | | |
| | 17 | COM | BLACK | 18 | | | | |
| | 18 | COM | BLACK | 18 | | | | |
| | 19 | COM | BLACK | 18 | | | | |
| | 20 | | | | | | | |
| | 21 | +5VDC | RED | 18 | | | | |
| | 22 | +5VDC | RED | 18 | | | | |
| | 23 | +5VDC | RED | 18 | | | | |
| 24 | COM | BLACK | 18 | | | | | |
| PA | 1 | +3.3V | ORANGE | 18 | CL1271HS0 15P or EQUIV. | 500 ⁺³⁰ ₋₁₀ mm | | |
| | 2 | COM | BLACK | 18 | | | | |
| | 3 | +5V | RED | 18 | | | | |
| | 4 | COM | BLACK | 18 | | | | |
| | 5 | +12V3 | YELLOW | 18 | | | | |
| PB | 1 | +3.3V | ORANGE | 18 | CL1270H00 15P or EQUIV. | 200 ±10 mm | | |
| | 2 | COM | BLACK | 18 | | | | |
| | 3 | +5V | RED | 18 | | | | |
| | 4 | COM | BLACK | 18 | | | | |
| | 5 | +12V3 | YELLOW | 18 | | | | |
| P2 | 1 | COM | BLACK | 18 | WST P4-142002K 3B+ P4-142002K 4B or EQUIV. | 500 ⁺³⁰ ₋₁₀ mm | | |
| | 2 | COM | BLACK | 18 | | | | |
| | 3 | COM | BLACK | 18 | | | | |
| | 4 | COM | BLACK | 18 | | | | |
| | 5 | +12V1 | YEL/BLUE | 18 | | | | |
| | 6 | +12V1 | YEL/BLUE | 18 | | | | |
| | 7 | +12V2 | YEL/GREEN | 18 | | | | |
| | 8 | +12V2 | YEL/GREEN | 18 | | | | |
| P4 P7 | 1 | +12V4 | YEL/BLK | 18 | AMP 1-480424-0 or EQUIV. | 500 ⁺³⁰ ₋₁₀ mm | | |
| | 2 | COM | BLACK | 18 | | | | |
| | 3 | COM | BLACK | 18 | | | | |
| | 4 | +5V | RED | 18 | | | | |
| P5 P8 P9 | 1 | +12V4 | YEL/BLK | 18 | AMP 1-480424-0 or EQUIV. | 150±10mm | | |
| | 2 | COM | BLACK | 18 | | | | |
| | 3 | COM | BLACK | 18 | | | | |
| | 4 | +5V | RED | 18 | | | | |
| P6 | 1 | +5V | RED | 20 | AMP 171822-4 or EQUIV. | 150±10mm | | |
| | 2 | COM | BLACK | 20 | | | | |
| | 3 | COM | BLACK | 20 | | | | |
| | 4 | +12V4 | YEL/BLK | 20 | | | | |
| P11 | 1 | +12V4 | YEL/BLACK | 18 | JWT C4202H00- 2*3PA-RP or EQUIV. | 500 ⁺³⁰ ₋₁₀ mm | | |
| | 2 | +12V4 | YEL/BLACK | 18 | | | | |
| | 3 | +12V4 | YEL/BLACK | 18 | | | | |
| | 4 | COM | BLACK | 18 | | | | |
| | 5 | COM | BLACK | 18 | | | | |
| | 6 | COM | BLACK | 18 | | | | |
| P10 | 1 | +12V3 | YELLOW | 18 | JWT C4202H00- 2*3PA-RP or EQUIV. | 500 ⁺³⁰ ₋₁₀ mm | | |
| | 2 | +12V3 | YELLOW | 18 | | | | |
| | 3 | +12V3 | YELLOW | 18 | | | | |
| | 4 | COM | BLACK | 18 | | | | |
| | 5 | COM | BLACK | 18 | | | | |
| | 6 | COM | BLACK | 18 | | | | |

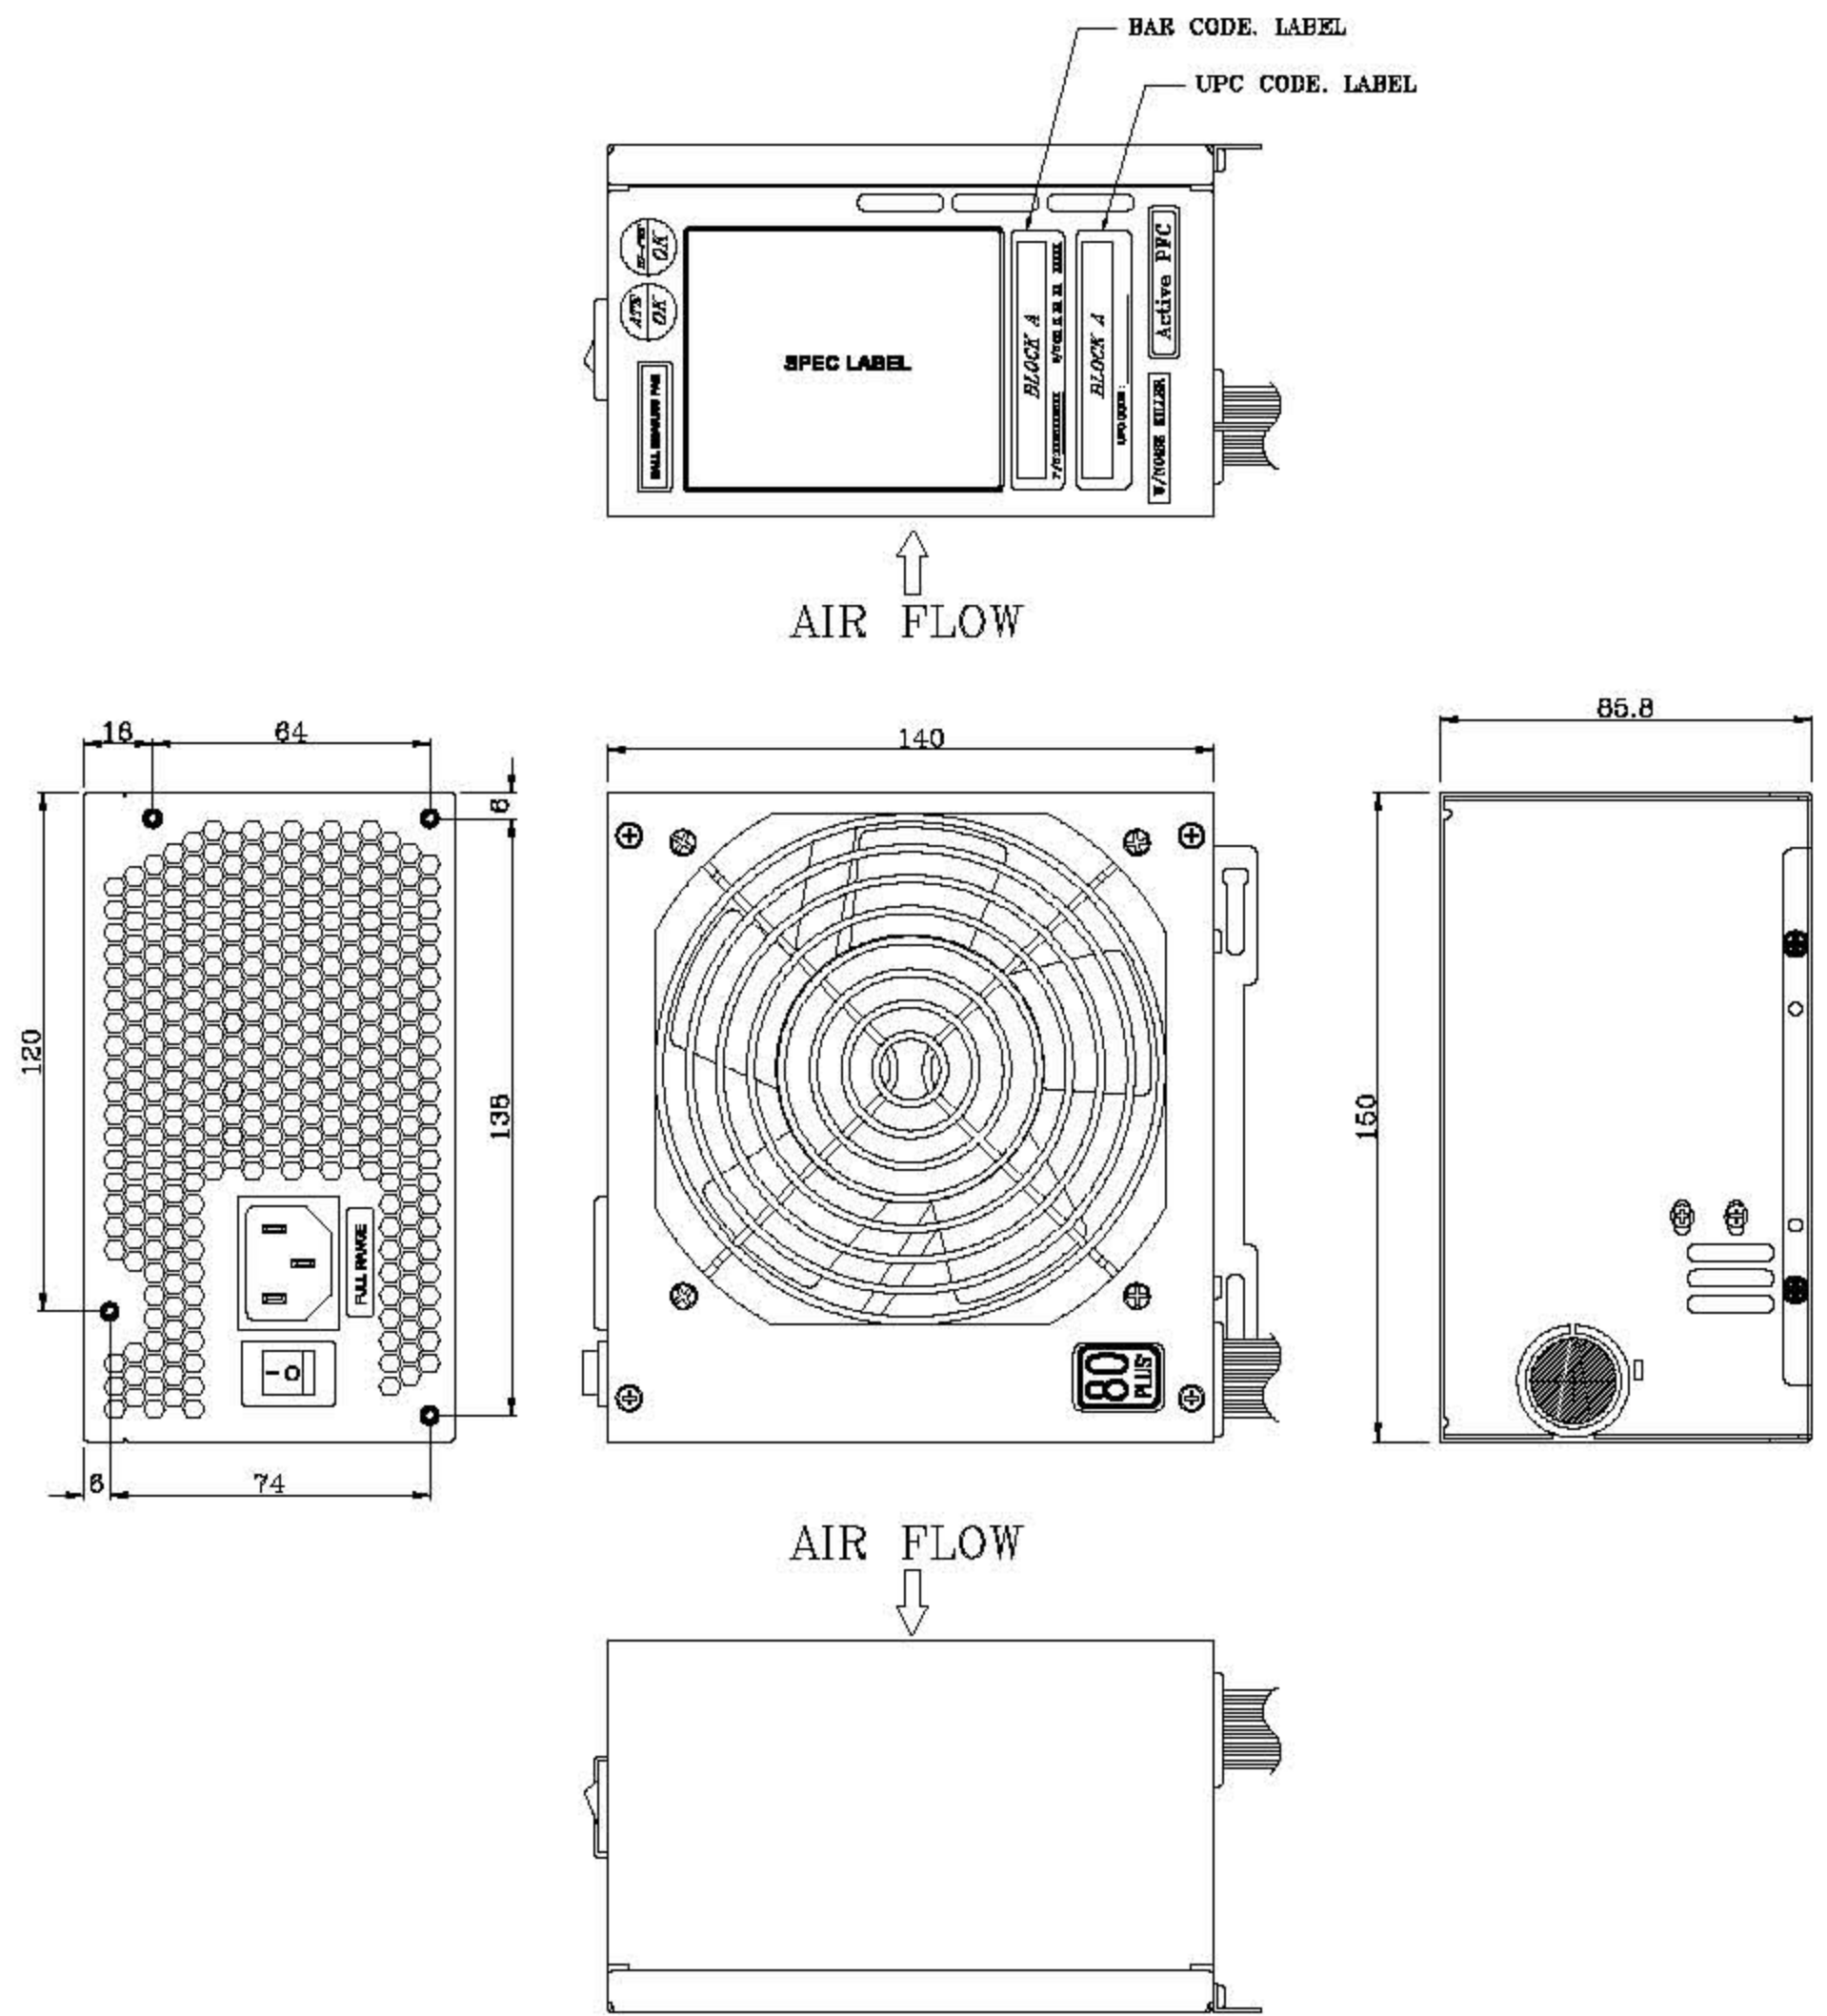

P/N.:9PA6000318
SPI P/N.:SPI600GLN

NOTE:
 1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. 產地標籤依業務指示加貼.

UNIT:mm

| | | | | | | |
|--------------------------------|----|-------------|--------|---------------|-------------|-----------------|
| MODEL NO. : SPI600GLN (S03003) | | TITLE: ASSY | | SHEET: 1 OF 1 | | REV:02 |
| R&D(8) | PE | CHECKED | DESIGN | DRAWN | DATE | |
| | | | | | OCT.27.2006 | |
| INTERIOR COUNTERSIGN: | | | | | | XIAHOUYJ |

文件資料管制 文件資料管制 文件資料管制

OAD06067478-R3.pdf 發行時間：2006/11/28 8:39 下午 1 / 1 禁止翻印外洩