



| REF. ID. | REF. NO. | SIGNAL  | WIRE COLOR | GAGE  | CONNECTOR TYPE                                   | GAUGE LENGTH |    |  |          |
|----------|----------|---------|------------|-------|--|--------------|----|--|----------|
| P1       | 1        | +3.3VDC | ORANGE     | 18    | WST<br>P4-1400024-0<br>P4-1400024-0<br>OR EQUIV. | 400±10mm     |    |  |          |
|          | 2        | +3.3VDC | ORANGE     | 18    |  |              |    |  |          |
|          | 3        | COM     | BLACK      | 18    |  |              |    |  |          |
|          | 4        | +5VDC   | RED        | 18    |  |              |    |  |          |
|          | 5        | COM     | BLACK      | 18    |  |              |    |  |          |
|          | 6        | +5VDC   | RED        | 18    |  |              |    |  |          |
|          | 7        | COM     | BLACK      | 18    |  |              |    |  |          |
|          | 8        | PW-OK   | GRAY       | 24    |  |              |    |  |          |
|          | 9        | +5Vsb   | PURPLE     | 20    |  |              |    |  |          |
|          | 10       | +12V3   | YELLOW     | 18    |  |              |    |  |          |
|          | 11       | +12V3   | YELLOW     | 18    |  |              |    |  |          |
|          | 12       | +3.3VDC | ORANGE     | 18    |  |              |    |  |          |
|          | P1/24    | 13      | +3.3Vsb    | BROWN |  |              | 24 | WST<br>P4-1400024-0<br>P4-1400024-0<br>OR EQUIV. | 400±10mm |
|          |          | 14      | -12VDC     | BLUE  |  |              | 24 |  |          |
|          |          | 15      | COM        | BLACK |  |              | 18 |  |          |
|          |          | 16      | PS-ON      | GREEN |  |              | 24 |  |          |
|          |          | 17      | COM        | BLACK |  |              | 18 |  |          |
|          |          | 18      | COM        | BLACK |  |              | 18 |  |          |
|          |          | 19      | COM        | BLACK |  |              | 18 |  |          |
|          |          | 20      | COM        | BLACK |  |              | 18 |  |          |
| P2       | 21       | +5VDC   | RED        | 18    | WST<br>SP-07592-001<br>OR EQUIV.                 | 550±10mm     |    |  |          |
|          | 22       | +5VDC   | RED        | 18    |  |              |    |  |          |
|          | 23       | +5VDC   | RED        | 18    |  |              |    |  |          |
|          | 24       | COM     | BLACK      | 18    |  |              |    |  |          |
| P3       | 1        | +3.3V   | ORANGE     | 18    | WST<br>SP-07592-001<br>OR EQUIV.                 | 150±10mm     |    |  |          |
|          | 2        | COM     | BLACK      | 18    |  |              |    |  |          |
|          | 3        | +5V     | RED        | 18    |  |              |    |  |          |
|          | 4        | +5V     | RED        | 18    |  |              |    |  |          |
|          | 5        | +12V3   | YELLOW     | 18    |  |              |    |  |          |
| P4       | 1        | +3.3V   | ORANGE     | 18    | WST<br>1-40024-0<br>OR EQUIV.                    | 150±10mm     |    |  |          |
|          | 2        | COM     | BLACK      | 18    |  |              |    |  |          |
|          | 3        | COM     | BLACK      | 18    |  |              |    |  |          |
|          | 4        | +5V     | RED        | 18    |  |              |    |  |          |
| P5       | 1        | +5V     | RED        | 20    | AMP<br>171622-4<br>OR EQUIV.                     | 150±10mm     |    |  |          |
|          | 2        | COM     | BLACK      | 20    |  |              |    |  |          |
|          | 3        | COM     | BLACK      | 20    |  |              |    |  |          |
|          | 4        | +5V     | RED        | 20    |  |              |    |  |          |
| P6       | 1        | +12V3   | YELLOW     | 20    | WST<br>P4-1400024-0<br>OR EQUIV.                 | 450±10mm     |    |  |          |
|          | 2        | +12V2   | YEL./WHITE | 18    |  |              |    |  |          |
|          | 3        | +12V2   | YEL./WHITE | 18    |  |              |    |  |          |
|          | 4        | COM     | BLACK      | 18    |  |              |    |  |          |
| P7       | 1        | +12V4   | YEL./BLK   | 18    | WST<br>P4-1400024-0<br>OR EQUIV.                 | 450±10mm     |    |  |          |
|          | 2        | +12V4   | YEL./BLK   | 18    |  |              |    |  |          |
|          | 3        | COM     | BLACK      | 18    |  |              |    |  |          |
|          | 4        | COM     | BLACK      | 18    |  |              |    |  |          |
| P8       | 1        | COM     | BLACK      | 18    | WST<br>P4-1400024-0<br>OR EQUIV.                 | 450±10mm     |    |  |          |
|          | 2        | COM     | BLACK      | 18    |  |              |    |  |          |
|          | 3        | COM     | BLACK      | 18    |  |              |    |  |          |
|          | 4        | COM     | BLACK      | 18    |  |              |    |  |          |

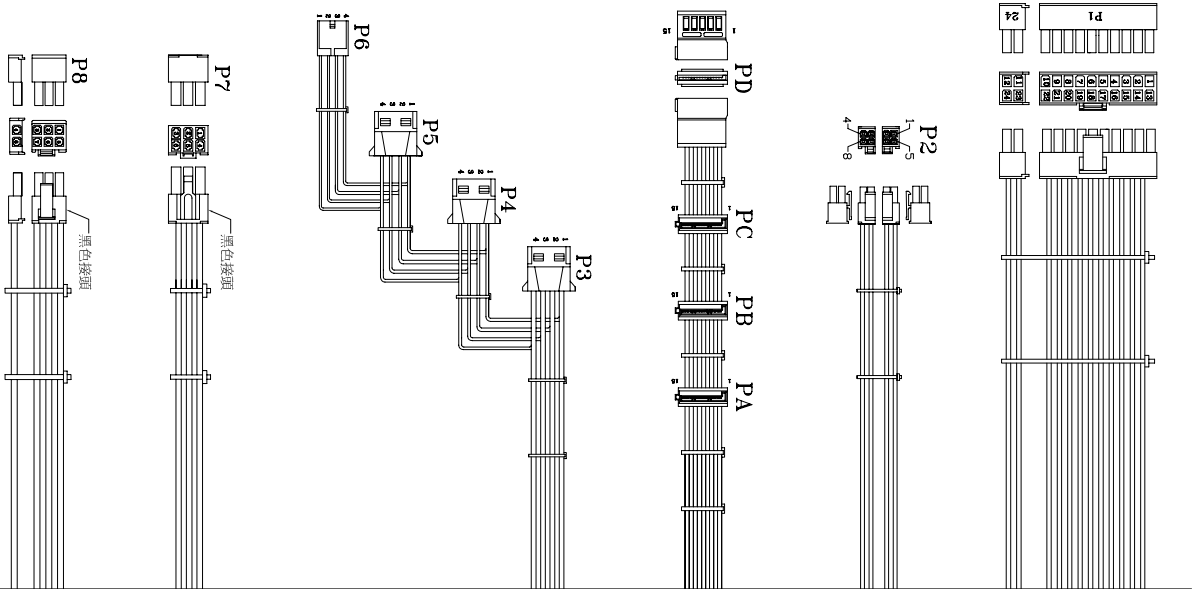

NOTE:  
1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.  
2. 產地標籤依業務指示加貼.

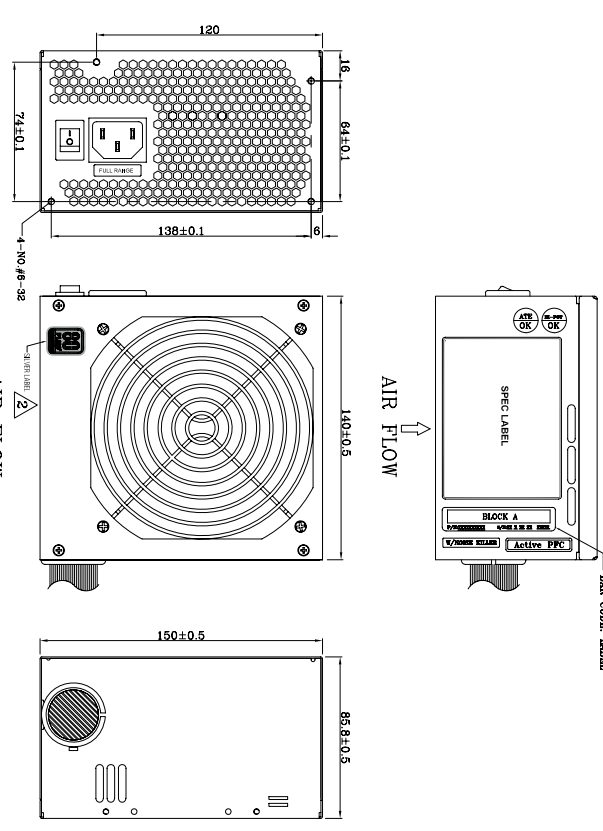

|      |    |         |     |    |
|------|----|---------|-----|----|
| 修改版本 | 序號 | 修改事項    | 修改者 | 備註 |
| 2    | 1  | 加貼防靜電貼紙 | 高瑜瓊 |    |

SPI P/N: SPI700ACH5B

|            |             |        |      |        |        |               |    |
|------------|-------------|--------|------|--------|--------|---------------|----|
| MODEL NO.: | SPI700ACH5B | TITLE: | ASSY | SHEET: | 1 OF 1 | REV:          | 02 |
| R&D        | (8)         | PE     |      | DRAWN  |        | DATE          |    |
|            |             |        |      | 高瑜瓊    |        | APR. 29, 2009 |    |

Mechanical Drawing(外觀/機構圖)表單編號: 000P-0111