
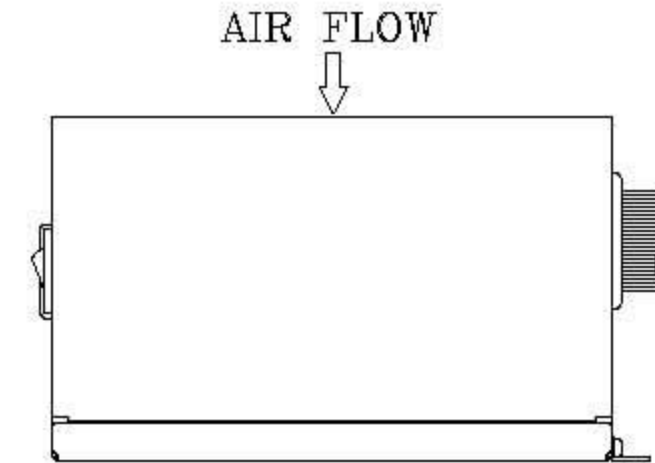
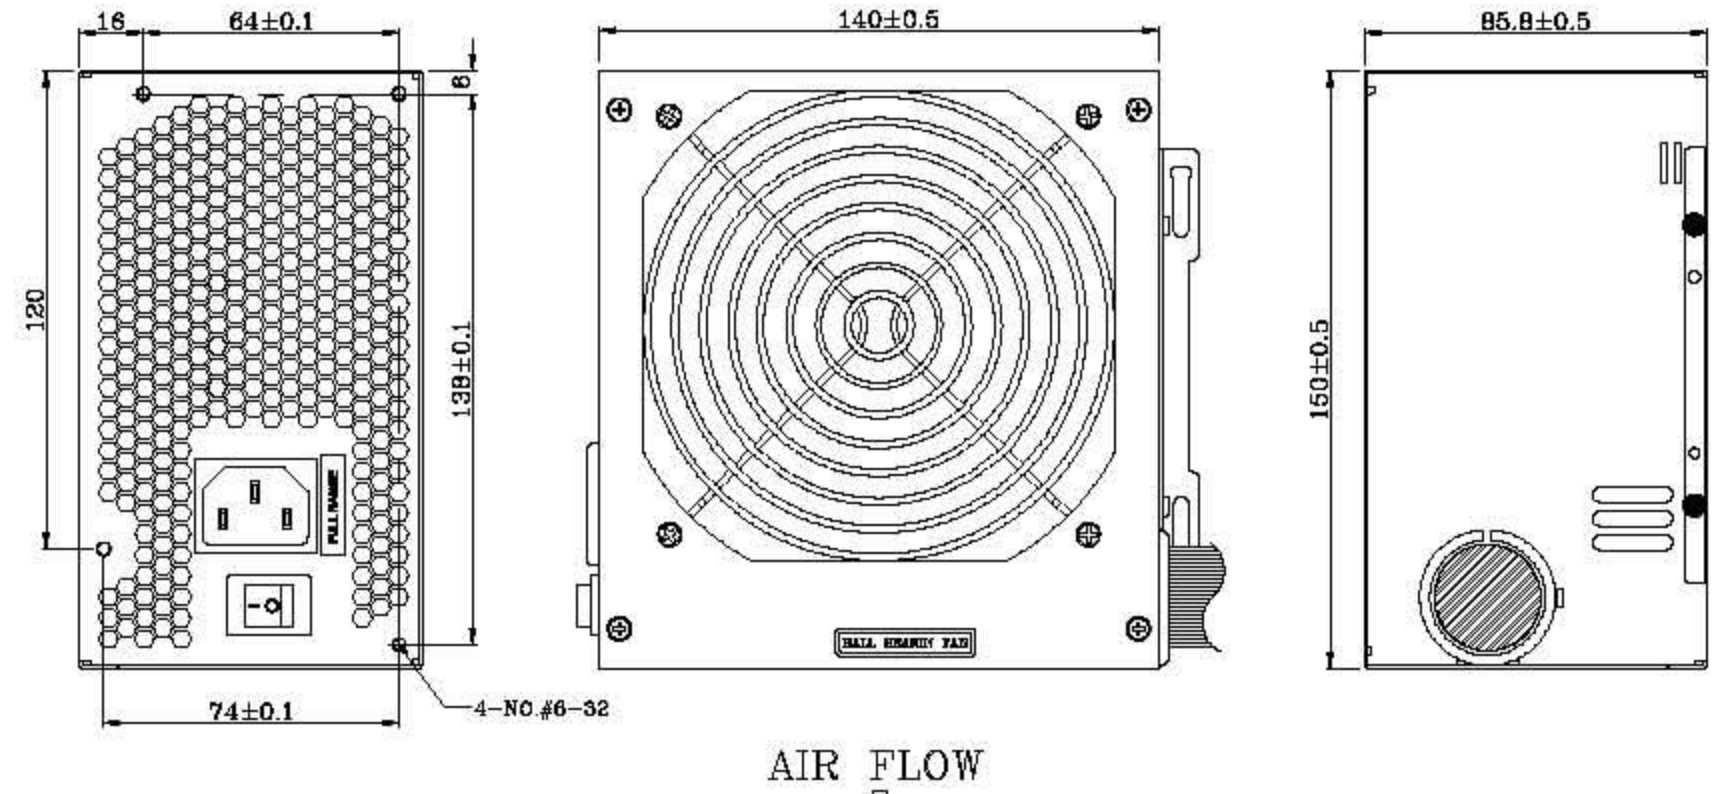
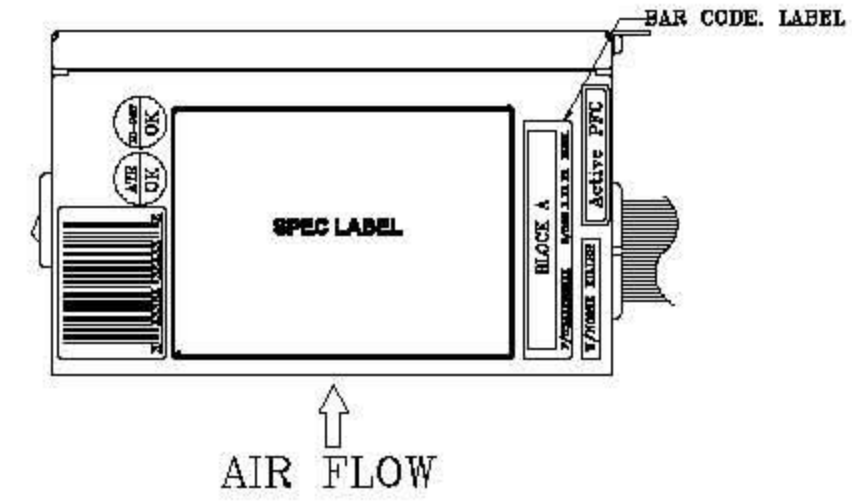


REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	CABLE LENGTH		
P1 /24	1	+3.3VDC	ORANGE	18	WST P20-142002BK11D +P4-142002BK11D OR EQUIVALENT	400 ⁺²⁰ ₋₁₀ mm		
	2	+3.3VDC	ORANGE	18				
	3	COM	BLACK	18				
	4	+5VDC	RED	18				
	5	COM	BLACK	18				
	6	+5VDC	RED	18				
	7	COM	BLACK	18				
	8	PW-OK	GRAY	24				
	9	+5Vsb	PURPLE	20				
	10	+12V1	YELLOW	18				
	11	+12V1	YELLOW	18				
	12	+3.3VDC	ORANGE	18				
	13	+3.3VDC	ORANGE	18				
	14	+3.3V Sense	BROWN	24				
	15	-12VDC	BLUE	24				
	16	COM	BLACK	18				
	17	PS-ON	GREEN	24				
	18	COM	BLACK	18				
	19	COM	BLACK	18				
	20							
	21	+5VDC	RED	18				
	22	+5VDC	RED	18				
	23	+5VDC	RED	18				
	24	COM	BLACK	18				
PA	1	+3.3V	ORANGE	18	MOLEX SD-67582-001 OR EQUIV.	150±10mm		
PC	2	COM	BLACK	18				
	3	+5V	RED	18				
PB	4	COM	BLACK	18	MOLEX SD-67582-0011 OR EQUIV.	400 ⁺²⁰ ₋₁₀ mm		
	5	+12V1	YELLOW	18				
PD	1	+3.3V	ORANGE	18				
	2	COM	BLACK	18				
PE	3	+5V	RED	18			MOLEX 36-01-2040 OR EQUIV.	400 ⁺²⁰ ₋₁₀ mm
	4	COM	BLACK	18				
PF	1	+12V2	YEL/BLK	18	AMP 1-480424-0 OR EQUIV.	400 ⁺²⁰ ₋₁₀ mm		
	2	+12V2	YEL/BLK	18				
PG	3	+5V	RED	18			AMP 1-480424-0 OR EQUIV.	150±10mm
	4	COM	BLACK	18				
PH	1	+12V1	YELLOW	20	AMP 1-480424-0 OR EQUIV.	150±10mm		
	2	COM	BLACK	20				
PI	3	+5V	RED	20			AMP 171822-4 OR EQUIV.	150±10mm
	4	COM	BLACK	20				
PJ	1	+12V1	YELLOW	18	WST P6-142002BK5 OR EQUIV.	400 ⁺²⁰ ₋₁₀ mm		
	2	+12V1	YELLOW	18				
PK	3	+12V1	YELLOW	18			WST P6-142002BK5 OR EQUIV.	400 ⁺²⁰ ₋₁₀ mm
	4	COM	BLACK	18				
PK	5	COM	BLACK	18				
	6	COM	BLACK	18				
	7	COM	BLACK	18				
	8	COM	BLACK	18				

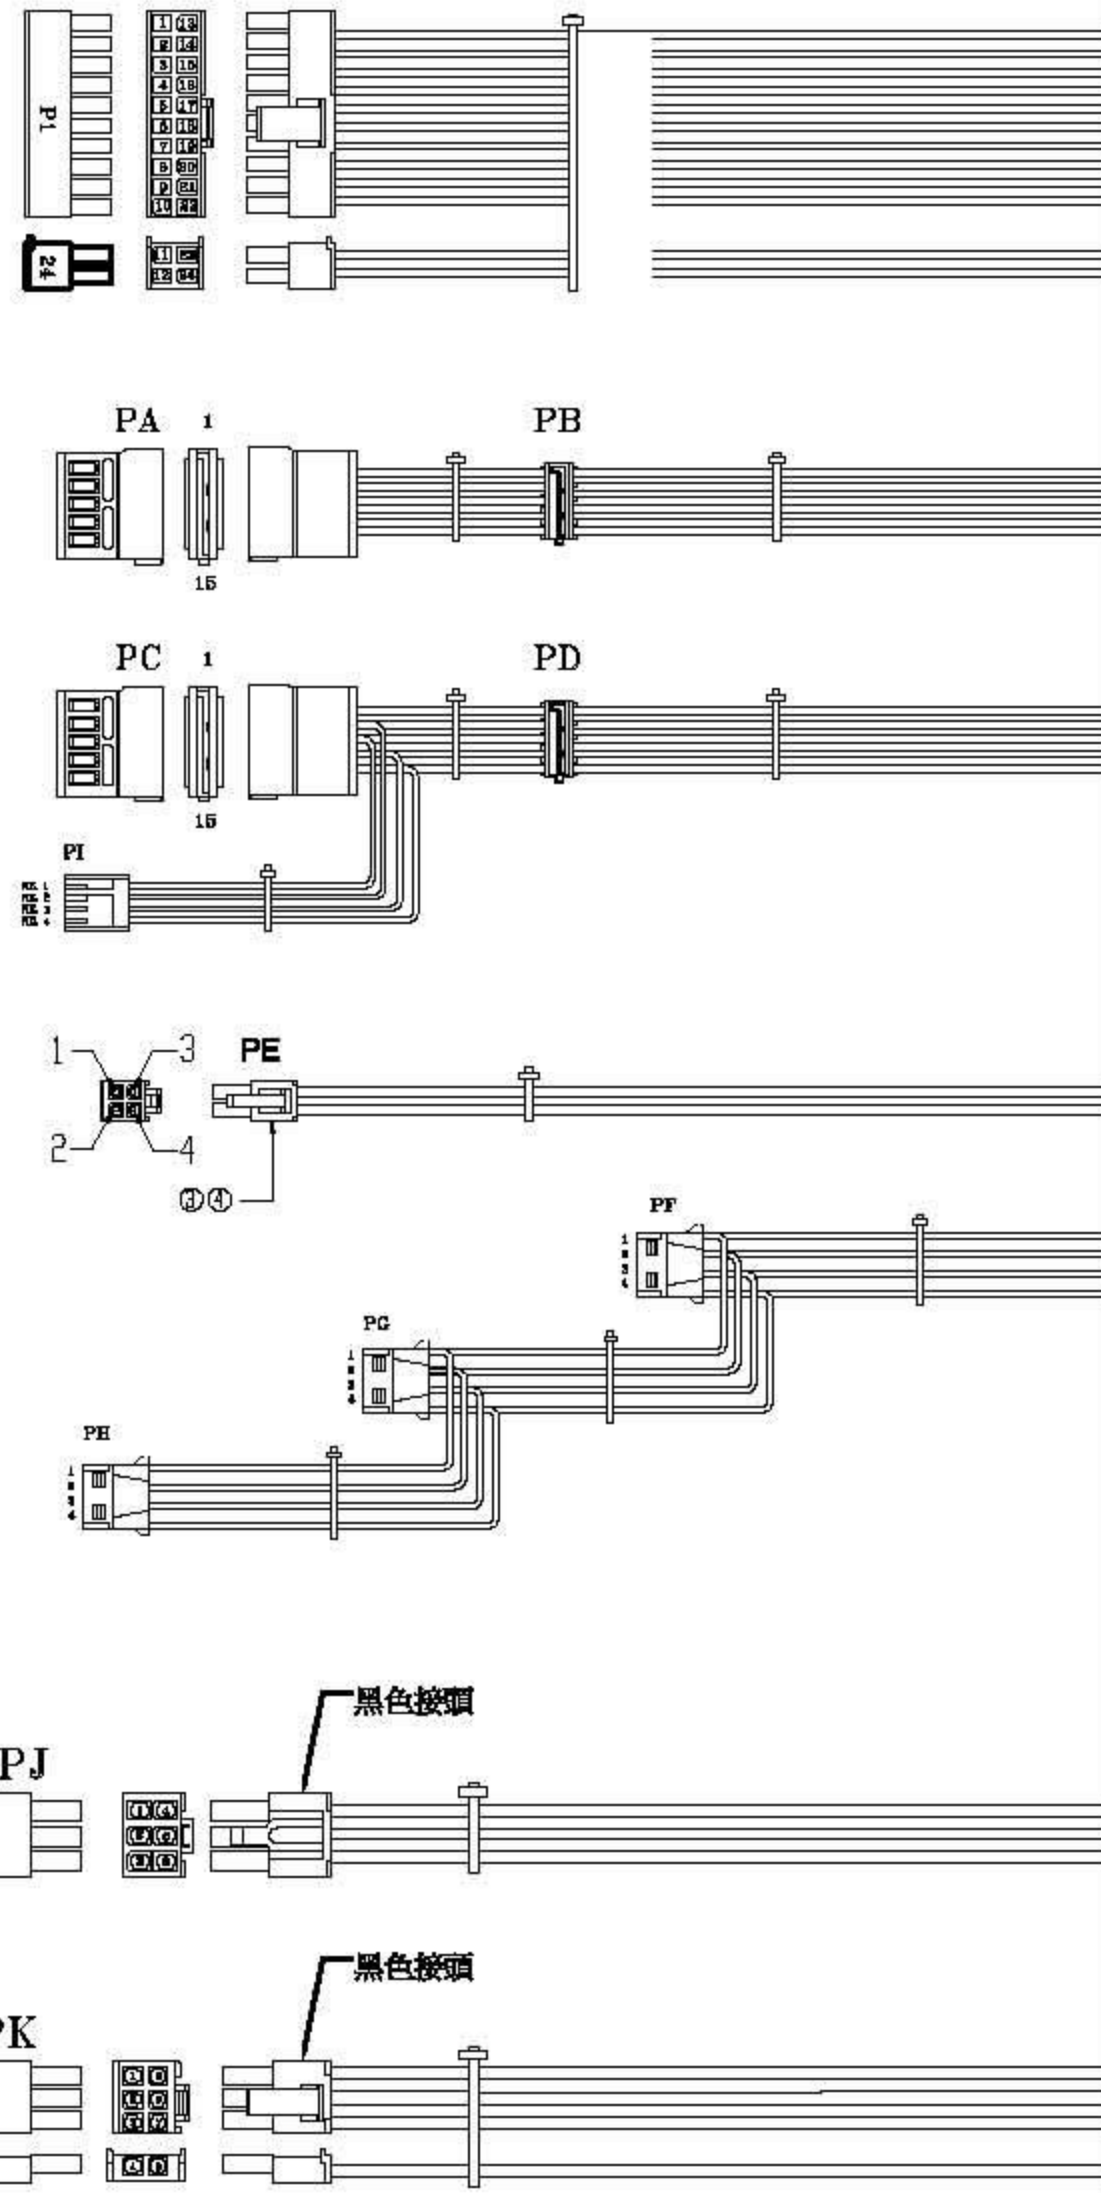

NOTE:
 1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. 產地標籤依業務指示加貼.

SPI P/N.:SPI500ACH8-B204

MODEL NO. : SPI500ACH8		TITLE: ASSY		SHEET: 1 OF 1	REV:01
R&D (8)		PE		DRAWN	
				DATE	
				MAY.27.2009	
				ChuanBing	