




Sparkle Power Inc.
 A Leading Power Supply Manufacturer
 Web site: www.sparklepower.com

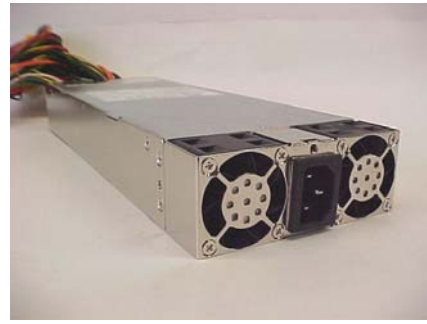

FSP460-601U (Active PFC & RoHS Compliant)
460 Watts, ATX12V, EPS12V, 1U Switching Power Supply

Features

- Complied with ATX, ATX12V and EPS12V standard
- Active Power Factor Correction (PFC) meet EN61000-3-2
- High efficiency and reliability
- Remote ON/OFF function
- Internal 12V DC fan included
- Noise Killer (thermal fan speed control function)
- Low noise and ripple
- Complies with FCC part 15 subpart J class B 115Vac operation, and CISPR 22 class B at 230Vac operation
- Output over voltage, short circuit, and over current protection
- 100% Hi-pot, ATE, and burn-in tested
- Re-settable power shut down
- Approved by UL60950, CSA C22.2 NO. 60950, TUV EN60950 or VDE EN60950, NEMKO EN60950 (CB Report), CE

Input Characteristics

Input Range: 90 ~ 265Vac (RMS), Full Range Input

Frequency: 47 ~ 63Hz

Input Current: 9A (RMS) @115Vac, 5A (RMS) @230Vac

Inrush Current: 80A Max @115Vac, 120A Max @230Vac cold

start

Output Characteristics

Output Voltage	Minimum Load	Maximum Load	Load Reg.	Line Reg.	Ripple & Noise
+3.3V	0.5A	30A	+5%/4%	± 1%	50mV P-P
+5V	0.5A	30A	+5%/4%	± 1%	50mV P-P
+12V	2.0A	32A	+5%/4%	± 1%	120mV P-P
-5V	0.0A	0.3A	± 10%	± 1%	120mV P-P
-12V	0.0A	0.8A	+9%/5%	± 2%	120mV P-P
+5Vsb	0.0A	2.0A	+5%/4%	± 1%	50mV P-P

*+5V and +3.3V total output not exceed 200W

*+3.3V, +5V, and +12V total output cannot exceed 440W

* This subject power supply is 460W

Specification

- **Temperature Range:** Operating: 0°C ~ +50°C on full load; storage & shipping: -20°C ~ +80°C
- **Humidity:** 5 ~ 95% on operating and storage
- **Dielectric Withstand:** Input to frame ground 1800 VAC for 1 second
- **Efficiency:** 65% at minimum measured at nominal AC main voltage and frequency with maximum load on all outputs
- **Rise time:** Less than 50ms
- **Hold-up Time:** 18ms minimum at nominal input voltage
- **Power Good Signal:** Power on delay time 100 ~ 500ms, off delay 1ms minimum (TTL and CMOS compatible)
- **Leakage Current:** Not exceed 3.5mA at 264Vac, 50Hz
- **MTBF:** 100,000 hours on maximum load at +25°C
- **Dimensions (LxWxH):** 300x106x40mm/11.8x4.2x1.6inch

Sparkle Power Inc.
Main Office
 1000 Rock Avenue
 San Jose, CA 95131
 TEL: 408-519-8888
 FAX: 408-519-9999
 E-MAIL: info@sparklepower.com

Sparkle Power Inc.
Los Angeles Office
 17071 Green Drive
 City of Industry, CA 91745
 TEL: 626-839-7180
 FAX: 626-839-3395

Sparkle Power Inc.
Colorado Office
 1316 Indian Paintbrush Lane
 Longmont, CO 80503
 TEL: 303-776-3281
 FAX: 303-776-7645

R&D

PE

TITLE ASSY
DRAWN

SHEET: 1 OF 1 | REV: 01

DATE

Aug. 26. 2005

黄钰婷

Mechanical Drawing 外觀/機構圖 表單編號 7000P-0111